



Shenzhen Suntech Co.,Ltd

USB Powered UVC Rigid LED Strip




Specification

Item No.:	STRG-4UVC3535
Light Source:	UVC LED chip
Input Voltage:	DC3.7v~DC24v
Power Consumption:	2.5W/pcs
Wavelength:	265~278nm
Dimensions:	200mm*12mm
Beam angle:	120 degree
Radiant Flux	20mw/pcs



Product Detail Description

- 1) 4 pcs UVC LED chip Per meter;
- 2) Good stability, CE & RoHS FCC approved;
- 3) Aluminium PCB stable quality and good heat dissipation.


UVC Disinfection module size:

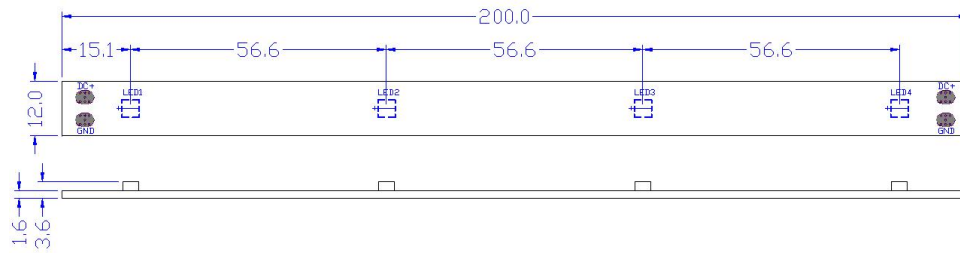

UVC LED chip information

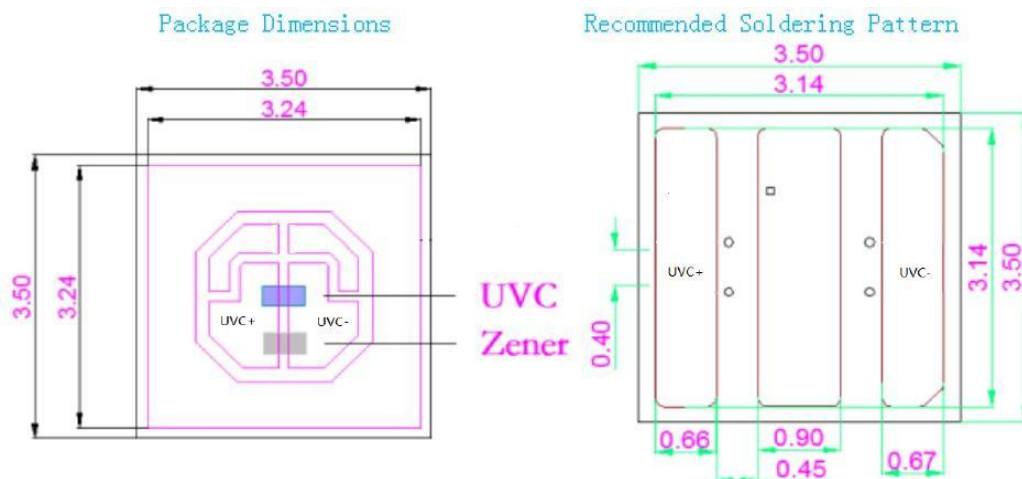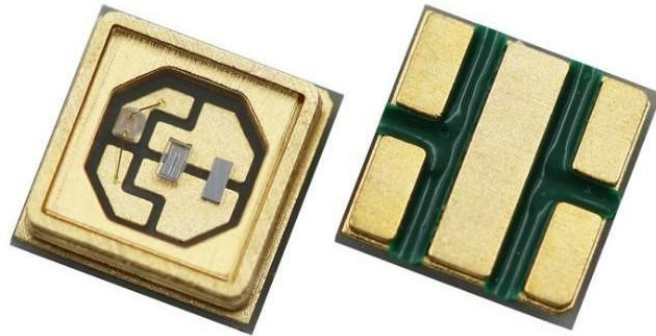

■ Relative Spectral Distribution vs. Wavelength at 25°C, I_F=30mA

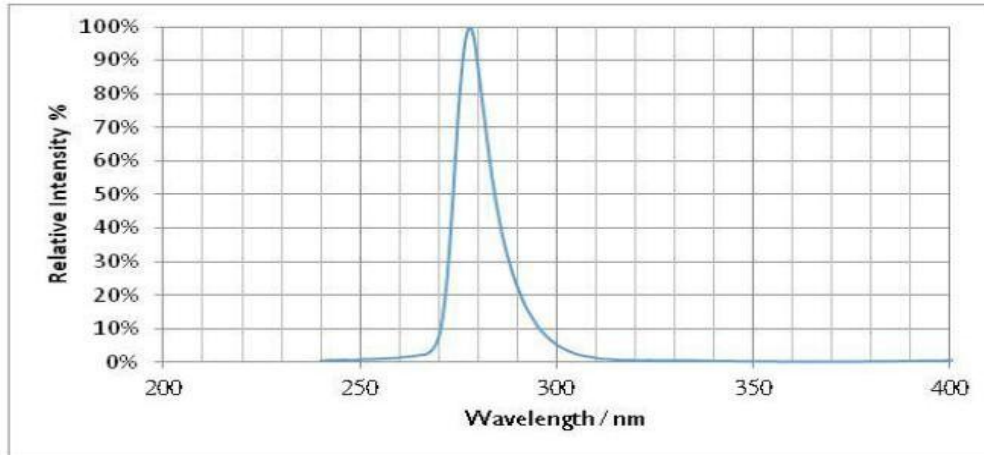

UVC-LED Module parameters			
Item		Value	Unit
UVC LED	Irradiation	20	mW
	Beam angle φ	120	°
Parameters	Irradiation distance	5	cm
	Irradiation area diameter	17.32	cm
	Optical power density	33.35	$\mu\text{W}/\text{cm}^2$



UVC Module Irradiation Area			
Input	Number of UVC in horizontal direction	4	pcs
	Number of lamp beads in vertical direction	0	pcs
	Horizontal distance of UVC chips	5	cm
	Vertical distance of UVC chips	0	cm
	Beam angle of UVC LED	120	°
	Irradiation distance	5	cm
Output	Horizontal length of irradiation area	32.32	cm
	Vertical length of irradiation area	17.32	cm

UVC-LED Module parameters	
Distance (cm)	Optical power density ($\mu\text{W}/\text{cm}^2$)
1	313.14
2	131.60
3.5	60.85
5	33.35
7.5	18.79

Application:

1. Surface Sterilization
2. Water purification
3. Air purification

Wire Connection:

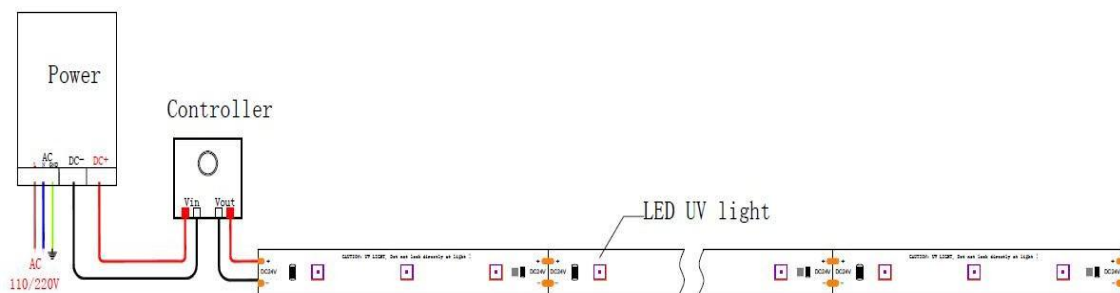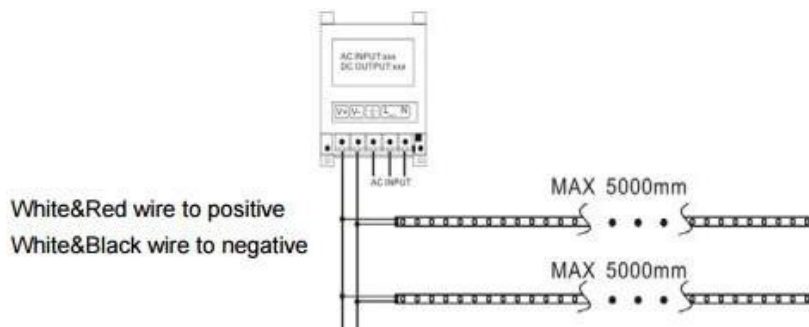

Attention!

1. Pay special attention: UV lamps, please do not look directly at the light source with the naked eye! Test please wear special goggles!
2. Please read the product instructions carefully before the product is installed and used;
3. The power output must be DC3.7V~DC24v
4. The product is lightly put, to avoid damage to the product, please hand over to professionals to install and repair, maintenance;
5. Please understand the label tips on the lamp packaging when wiring;
6. When wiring must cut off the external power supply, to prevent people from touching or damage the lamp, the product must be installed after the installation before powering;
7. When using external power cords outdoors, it is necessary to take measures to waterproof and leak water;
8. It is forbidden to press the surface of the LED;
9. The use of any acidic or alkaline adhesive type of glue is prohibited from contact with this product.